



臻御石

Stone Granite Paint

vanlei 万磊®

参数 (技术参数一览) / Parameters (List of technical parameters)			
天然砂 / Natural sand	100%	耐候性 / Weather resistance	20年以上 / More than 20 years
目数 / Number of mesh	80-200 目 / mesh	防水性 / Water resistance	优等 / Excellent
乳液 / Emulsion	硅丙 (一级品) / Silicone acrylic (first-class product)	反白现象 / Inversion phenomenon	无 / No
乳液含量 / Emulsion content	20-28% /	表干时间 / Table dry time	2 小时 / 2 hours (25-30 ° C)
参考用量 / Reference dosage	2.5-3kg/m <sup>2</sup>	施工工具 / Construction tools	辊筒, 专用喷枪 / Roller, special spray gun
加水量 / Amount of water added	最多 5% Up to 5%	厚度 / Thickness	2mm
损耗率 / Loss rate	≤2%	硬度 / Hardness	2H
固含量 / Solid content	≥52%	毒性 / Toxicity	无 / No

涂装工序 / Painting process	涂料名称 / Paint name	涂装遍数 / Painting times
底漆 / Primer	万磊全效渗透透明底漆 / Vanlei full effect penetration transparent primer	1-2
底色 / Base color	金装外墙白色底漆 / Gold exterior wall white primer	1-2
主材 / Main material	主材 / VanleiZhen Royal Stone Main material	1-2
面漆 / Topcoat	面漆 / Gold exterior wall protection topcoat	1-2

## Stone Granite Paint


臻御石





扫码体验  
VR全景

ZY-01 锈石钻

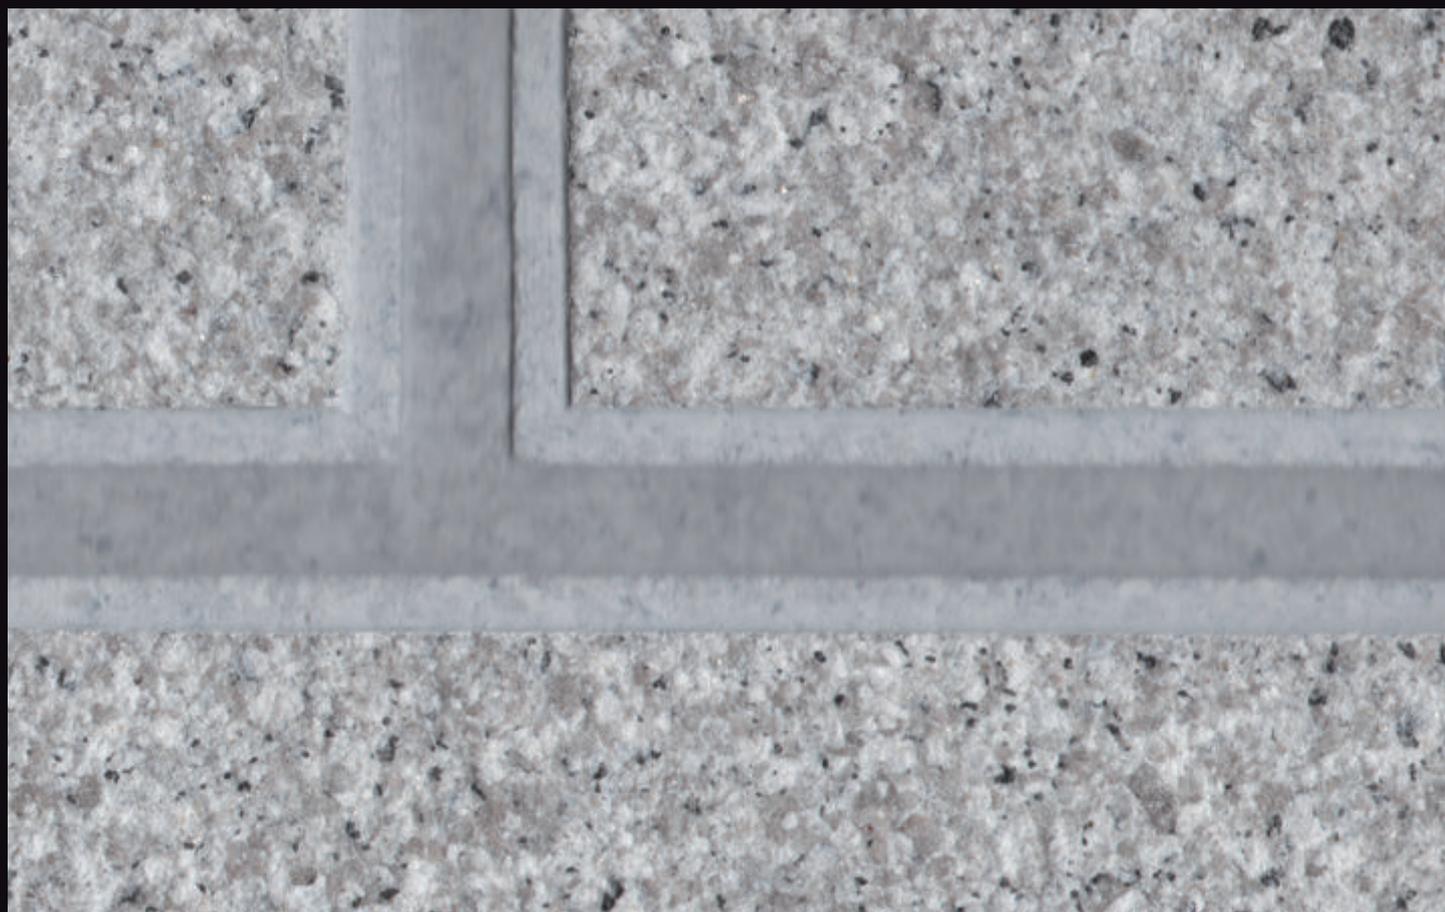

扫码体验  
VR全景

ZY-02 星麻石



扫码体验  
VR全景

ZY-03 黄金石



扫码体验  
VR全景


ZY-04 红宝石



ZY - 05 贵族麻



ZY - 06 钻石黄

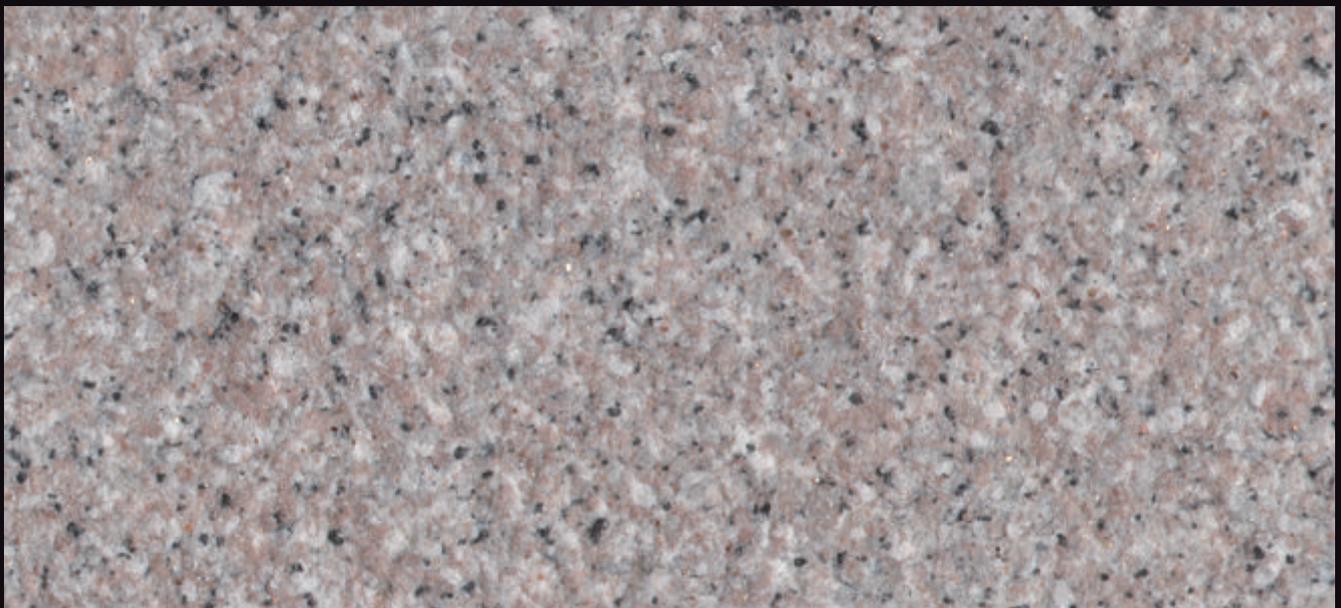


ZY - 07 西丽红



ZY - 08 揭阳红



ZY - 09 白麻石

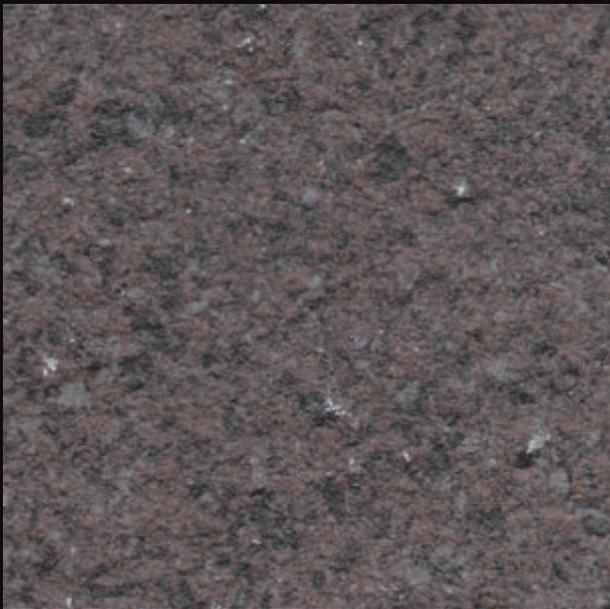


ZY - 10 贵妃红



ZY - 11 红麻钻



ZY - 12 咖啡金

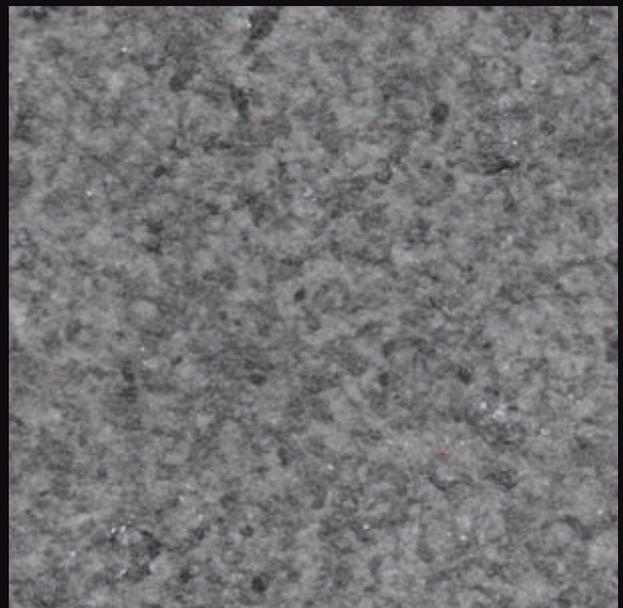

ZY - 13 灰金石

## 万磊·臻御石 (Stone Granite Paint)

### 概述 / Overview

万磊·臻御石一枪成型,可以承受20年的耐用性能。

Manlei - Pegasus Stone is a one-shot molding that can withstand up to 20 years of durable performance.

万磊·臻御石所选石材经过百里挑一的经筛选的天然石英砂、硅丙乳液及升级进口多彩保护胶精制而成,漆膜致密坚硬,耐刮擦,可媲美大理石表面的硬度,对墙体保护作用显著。采用万磊在中国独创的无阻力喷涂配方,具有更逼真的仿石效果。

The stone selected by Wanlei - Pegasus Stone is made of natural quartz sand, silicone propylene emulsion and upgraded imported colorful protective adhesive, which makes the paint film dense, hard and scratch-resistant, comparable to the hardness of the marble surface, and has a significant effect on the protection of the wall. Adopting Wanlei's original non-resistance spraying formula in China, it has more realistic stone-like effect.

## 适用范围 / Scope of application

水泥砂浆面,石膏板,混泥土面,清水模面,金属板,预铸混泥土板,铝板等内外墙建筑基面。

Cement mortar surface, gypsum board, concrete surface, clear water mold surface, metal board, pre-cast concrete board, aluminum board and other internal and external wall building substrates.

## 技术参数 / Technical parameters



底漆

Primer :5-8m<sup>2</sup>/kg



主材(喷)

Main material (spray) :2.5-3kg/m<sup>2</sup>



面漆:

Top coat:8-10m<sup>2</sup>/kg

## 效果特性 / Effect characteristics



防污染性:表面光滑,污物难以附着,灰尘可以用中性洗剂水洗。

Anti-pollution: smooth surface, dirt is difficult to adhere to, dust can be washed with neutral detergent water.



施工简单:用专用喷枪一次就可以完成多彩(2-3色)的花纹造型。

construction is simple: with a special spray gun can be completed once colorful (2-3 colors) pattern modeling.



应变自如:任何部位都可喷涂,转角、圆弧等一喷即可,工期可以大大缩短。

Strain free: any part can be sprayed, corners, arcs, etc. can be sprayed, the work period can be greatly reduced.



2H硬度:耐候硬度与防撞性能。

2H hardness: weather-resistant hardness and anti-collision performance.



优异的附着力:由于对于各种基面的附着力强,因此应用范围非常广泛。

Excellent adhesion: due to the strong adhesion to a variety of substrates, so the application range is very wide.



优良的耐化学性:优良的耐水、耐碱性,不必担心褪色、变色情形。

Excellent chemical resistance: excellent water resistance, alkali resistance, do not have to worry about fading, discoloration.

## 认证 / Accreditation



## 施工方法 / Construction method:



### 空压机调试参数 / Construction method

喷涂时,空气压缩机气压要达到7kg以上,用专用喷枪均匀臻御石主料主料(口径在3.0-4.0),每遍施工间隔8h(25±2°C),枪口须垂直墙面,喷涂时枪口距离墙面约40cm-60cm为宜。

Air compressor debugging parameters: Spraying, the air compressor air pressure to reach more than 7kg, with a special spray gun evenly ZhenYuShi main material main material (caliber in 3.0-4.0), each construction interval 8h (25 ± 2 °C), the muzzle of the gun shall be perpendicular to the wall surface, spraying the muzzle of the gun distance from the wall surface of about 40cm-60cm is appropriate.



### 主材施工 / Main material construction

01 必须待底漆干透后才能进行喷涂施工。

Must wait until the primer is dry before spraying.

02 喷涂时尽量喷涂均匀,走枪速度一致,不能在墙面上停顿,避免造成发花。

Spraying as much as possible when spraying uniform, consistent gun speed, can not stop on the wall, to avoid causing bloom.

03 每个喷涂面应一次完成,施工必须由建筑物自上而下进行。

Each spraying surface should be completed at once, the construction must be carried out from top to bottom of the building.

04 完全干燥24h后才能施工保护面漆。

The construction must be carried out from the top to the bottom of the building. The protective finish can be constructed only after it is completely dry for 24h.



施工视频  
Construction Video



详尽施工流程  
Detailed construction process

## 万磊品牌 / Vanlei brand

- ✔ 自营工厂, 100%自主研发  
Self-operated factory, 100% independent research and development
- ✔ 被誉为涂料界的百科全书  
Known as the complete book of Lingo in the paint industry
- ✔ 30年以上内外墙涂料优质涂料制造经验  
More than 30 years of high-quality paint manufacturing experience in interior and exterior wall coatings
- ✔ 拥有ISO9001证书及法国A+认证  
Possess ISO9001 certificate and France A+ certification
- ✔ 全球第一家无印良品酒店官方涂料指定供应商  
The world's first official paint supplier for Muji hotels
- ✔ 完整施工后, 产品寿命保用年限15年以上  
After complete construction, the product life warranty is more than 15 years



## 万磊建筑涂料有限公司

Foshan City Nanhai Wanlei Building Paint CO., LTD



### 广东生产基地 (代码FS)

广东省佛山市南海区松岗万石工业区

### 广州分公司

广州市荔湾区羊城装饰材料市场118号

### 广西生产基地 (代码QT)

广西壮族自治区贵港市覃塘区产业园甘化园区

### 南宁分公司

广西壮族自治区南宁市兴宁区快环建材市场

### △ 注意

公司根据产品技术和发展需要, 有权对产品配方进行更新升级, 而不对外另行公布, 请以最新样板册颜色为准, 不便之处, 敬请原谅!

**4000-147-187** [www.fswanlei.com](http://www.fswanlei.com)