



PRODUCT

品赫精工石

SEIKO STONE



JGS - 240901

Unlimited versatility and
adaptability to both
modern and traditional designs

有无限的多功能性
而且适用于现代和传统设计



品赫 / 精工石

SEIKO STONE

适用范围 APPLICABLE SCOPE

室内, 室外, 墙面装饰使用

石膏板: (仅限室内) 涂抹 品赫精工石 前, 应先对表面进行检查, 并注意打磨平整, 仅使用矿物底漆或推荐的乳胶或丙烯酸底漆

现有的涂漆基材: 只要是乳胶或丙烯酸 (水性), 品赫精工石就能粘附在先前存在的涂漆表面上。我们建议在涂抹石膏之前先打磨表面以获得更好的粘附性, 并擦去灰尘。如有必要, 在涂抹品赫精工石之前使用万磊金装透明底漆或推荐的乳胶或丙烯酸底漆

现存纹理的墙面: 品赫精工石可应用于现有的中等纹理, 如橘皮或轻型跳跃抹刀。涂上第一层以覆盖纹理。厚度过大可能会出现轻微开裂, 只要没有分层或剥落, 这是可以接受的

Indoor, outdoor, and wall decoration use

Gypsum board: (indoor only) Before applying Pinhe Precision Stone, the surface should be inspected and polished flat. Only mineral primer or recommended latex or acrylic primer should be used

Existing paint substrates: As long as they are latex or acrylic (water-based), Pinhe Precision Stone can adhere to the previously existing paint surface. We suggest polishing the surface for better adhesion and wiping off dust before applying gypsum. If necessary, use Wanlei gold transparent primer or recommended latex or acrylic primer before applying Pinhe Precision Stone

Existing textured walls: Pinhe Precision Stone can be applied to existing medium textures, such as orange peel or light jumping spatulas. Apply the first layer to cover the texture. Excessive thickness may result in slight cracking, as long as there is no layering or peeling, which is acceptable



精选原料

精选全岩颗粒, 纹理效果极佳

Selected raw materials

Selected whole rock particles with excellent texture effect



风格多样

纹理效果可满足不同装饰风格

Diverse styles

The texture effect can meet different decorative styles



多样式施工

提供6种基础纹理状态

Multi style construction

Provide 6 basic texture states



防水防污

性能强, 不怕污渍

Waterproof and anti fouling

Strong performance, not afraid of stains



无障碍施工

整体墙面无缝, 效率更高

Accessible construction

The overall wall has no seams, resulting in higher efficiency



色彩选择丰富

白色底材+色浆, 自由选择

Rich color selection

White substrate+color paste, free to choose from



绿色环保

不含有害物质, 对环境友好

Green and environmentally friendly

Free from harmful substances and environmentally friendly

物理特性 PHYSICAL PROPERTIES

密度 Density	1.85kg/L
pH 值 pH-value	8.5
耐水性 Water resistance	≥1000 次
耐候性 Weather ability	干燥 24 小时后表面稳定 Stable surface after 24 hours
使用寿命 Service life	10 年 (长期稳定) 10 years

TONER.
THIN
薄鈍



JGS - 6117 (100g)

平批效果

TONER.
TIN
锡色



JGS - 6117 (100gX2)

乱纹效果

TONER.
INK
墨



JGS - 6117 (100gX3)

雅晶石效果

TONER,
WHITE
白色



JGS - 基料



JGS - 6181 (100g)



TONER,
PEPPER
胡椒色



JGS - 6104 (100g)



JGS - 6121 (100g)

TONER,
GREY
浅鼠



JGS - 6105 (100g)



JGS - 6122 (100g)



JGS - 6189 (100g)

TONER,
GREEN
若绿



JGS - 6116 (100g)




JGS - 6124 (100g)



JGS - 8109 (500g)

TONER,
MECHA
媚茶

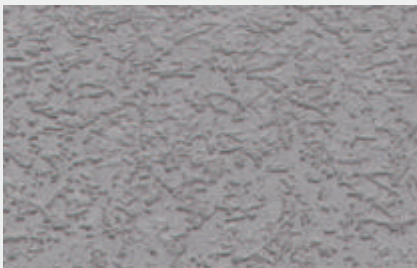

JGS - 6117 (100g)




JGS - 6120 (100g)




JGS - 8110 (500g)

TONER,
BEIGE
怡色

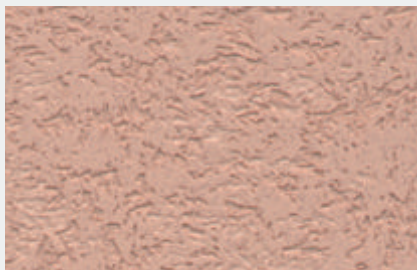


JGS - 6164 (100g)

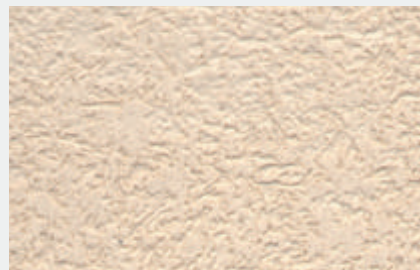


JGS - 6136 (100g)

TONER,
OCHRE
玉蜀黍色

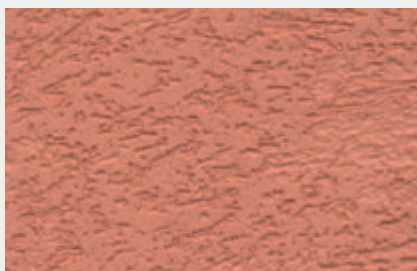


JGS - 8105 (500g)

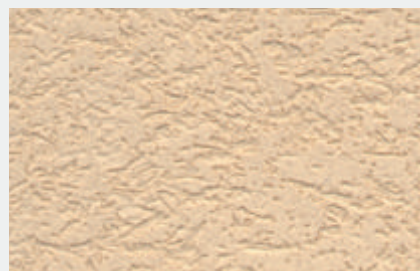

JGS - 6139 (100g)


TONER,
CITRUS
柑子色

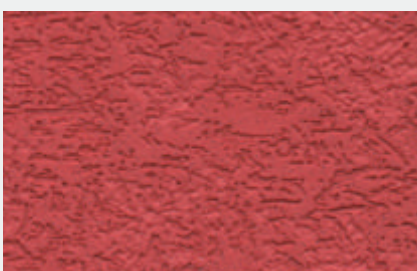

JGS - 8128 (500g)




JGS - 8107 (500g)

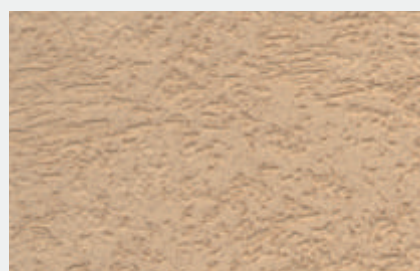

JGS - 6135 (100g)


TONER,
KINCHA
金茶

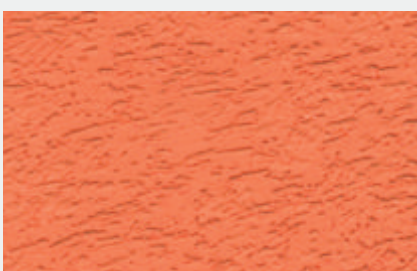

JGS - 8129 (500g)



JGS - 8126 (500g)

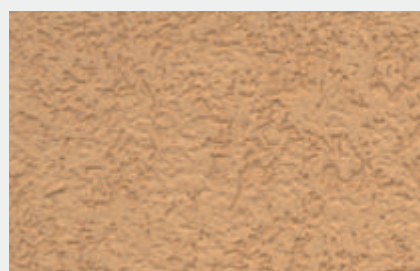


JGS - 8101 (500g)


TONER,
GOLDEN
金色



JGS - 8130 (500g)

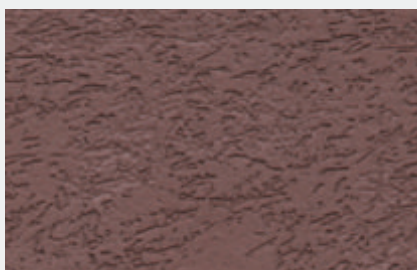

JGS - 8127 (500g)

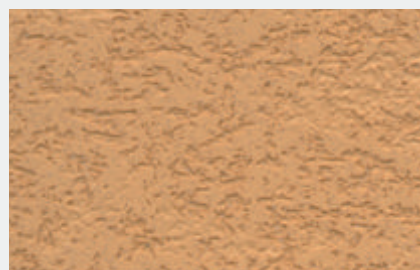

JGS - 8103 (500g)

TONER.
YELLOW
黄色



JGS - 6144 (100g)

拉毛效果


TONER.
YELLOW
中黄



JGS - 6144 (100gX2)

洞石效果

TONER.
YELLOW
藤黄

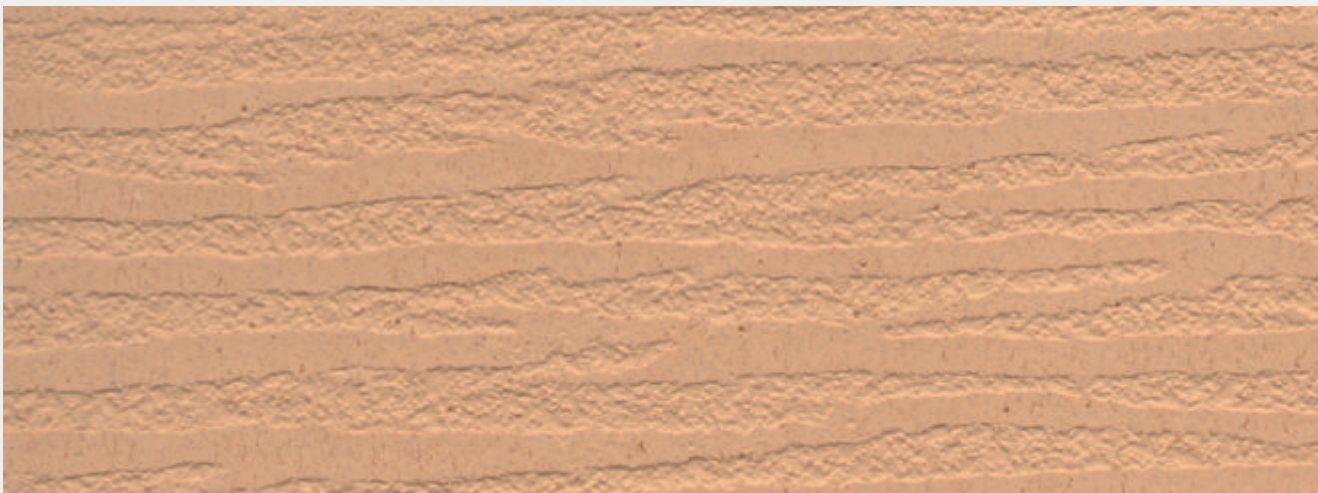

JGS - 6144 (100gX3)

树皮效果

万磊品赫精工石，意为品质显赫的精工细造的仿石涂料。它每一粒饱满的砂子都带有独特的光辉，都被冠以独特的流水型花纹，它同时是一种用于室内外的砖石覆盖物，可获得独一无二的装饰性饰面，类似于威尼斯古建筑中的灰泥。它可与矿物密封剂一起用于室内，既适合传统环境，也适合现代环境。万磊秉承一贯“高品质”的作风，我们将更注重品赫精工石的环保性能与健康品质

品赫精工石拥有精致的、环保无毒的墙面饰面,这些饰面不会释放气体(零VOC)并且具有低过敏性。我们的产品不仅在外观、感觉和纹理方面具有无限的多功能性,而且适用于现代和传统设计

Wanlei Pinhe Seiko Stone, meaning a finely crafted stone-like coating of outstanding quality. Each full grain of sand has a unique brilliance and is crowned with a distinctive flowing pattern, and it is also a masonry covering for both interior and exterior use to obtain a unique decorative finish, similar to stucco in ancient Venetian architecture. It can be used indoors with mineral sealers, suitable for both traditional and modern environments. In keeping with the "high quality" style of Wanlei, we will pay more attention to the environmental performance and health quality of Pinhe Precision Stone!

Pinnacle Stone has exquisite, environmentally friendly, non-toxic wall finishes that are non-emitting (zero VOC) and hypoallergenic. Our products offer unlimited versatility in look, feel and texture, and are suitable for both modern and traditional designs.

主要成分

纳米级丙烯酸乳液、精选岩石颗粒、纳米碳酸钙粉、纯净水

配套体系

万磊金装透明底漆(根据实际情况分为吸收性/非吸收性介质基底)
+ 品赫精工石 + 万磊金装哑光保护面漆

配套工具

羊毛辊筒、不锈钢批刀、刮板、光身滚筒、花齿滚筒、磨板

基面要求

- ② (轻微)掉粉时:辊涂无机养护液(兑水10-20%)一遍,12小时后再施工

施工方法

- ① 辊涂抗碱底漆, 必须完全封闭基层
- ② 用批刀薄批、找平一遍(可允许有漏底现象)
- ③ 主材兑水约3-5%, 薄批第二遍, 未干前用磨板, 打圈整体磨压
- ④ 干半后, 用磨板回压刮出虫蛀纹理
- ⑤ 干燥后轻微打磨, 半光抗刮罩面(可选配亮光或哑光罩面)

保质期

常温干燥状态下12个月(原装出厂时)

色彩系统



Base

Nano grade acrylic emulsion, selected rock particles, nano calcium carbonate powder, pure water

Support system

Vanlei Gold clear primer (according to the actual situation is divided into absorbent / non-absorbent medium substrate)
+ Pinhe Precision Stone + Vanlei Gold Matt Protective Topcoat

Tool

Wool roller, stainless steel screwdriver, scraper, Bare body rollers, fancy tooth rollers, grinding plates

Basic surface requirements

- ④ Water resistant putty powder must be used, with a flat surface and no peeling or powder peeling phenomenon
⑤ (Slight) Powder shedding: Roll apply inorganic curing solution (mixed with 10-20% water) once, and then resume construction after 12 hours


Construction methods

- ① Roller coating with alkali resistant primer must completely seal the base layer
- ② Use a screwdriver to thin the batch and level it once (bottom leakage may be allowed)
- ③ Mix the main material with water by about 3-5%, apply a thin batch for the second time, use a grinding plate before drying, circle and grind back as a whole
- ④ After half drying, use a grinding plate to press back and scrape out insect infested patterns
- ⑤ Slightly polished after drying, semi gloss scratch resistant cover (optional with glossy or matte cover)


Shelf life

12 months in a dry state at room temperature (when leaving the factory)

Colour System



Foshan City Nanhai Wanlei Building Paint CO., LTD



广东生产基地（代码FS）

广东省佛山市南海区松岗万石工业区

广州分公司

广州市荔湾区羊城装饰材料市场118号

广西生产基地（代码OT）

广西壮族自治区贵港市覃塘区产业园甘化园区

南宁分公司

广西壮族自治区南宁市兴宁区快环建材市场

⚠ 注意

公司根据产品技术和发展需要,有权对产品配方进行更新升级,而不
对外另行公布,请以最新样板册颜色为准,不便之处,敬请原谅!

4000-147-187 www.fswanlei.com